

Roled Opto Electronics (China)Co.,Ltd
Http://www.roled.com.cn
Email:sensing@sensingm.com
Tel: 0573-84236688(-121) Fax:+86-0573-84882788
Address:No.8,HechuangRoad,HuimingStreet, JiashanCounty,Jiaxin City , Zhejiang Province.

ROLED

灯具名称: 投光灯
灯具描述: FWK2331B8-3-24DC-RC-Y(30-OST-3RGBWN-AJ.P4)
报告编号: 电压(V): 24.0000
测试编号: 20221219002 电流(A): 1.4000
光源规格型号: OST 功率(W): 33.6000
每个光源光通量(lm) 功率因数: 1.0240
光源数量: 3 镇流器型号:
发光面长度(mm): 85 发光面宽度 (mm): 85
测试模式: C 发光面高度(mm): 0



光度结果

灯具光通量(lm): 1224.12
灯具效能(lm/w): 36.43
中心光强(cd): 2982.175
最大光强(cd): 3038.394
最大光强角度: $C=30.0 \gamma=0.0$
半峰边角(50%Imax): [C0/180]Total=30.4
 [C90/270]Total=30.4
光束扩散角(10%Imax): [C0/180]Total=64.4
 [C90/270]Total=64.0


测试设备: GMS-1800
环境温度(°C): 25.0

测试日期: 2022/12/19
环境湿度(%): 60.0%

测试人员: 安培楼
测试距离(m): 9.30

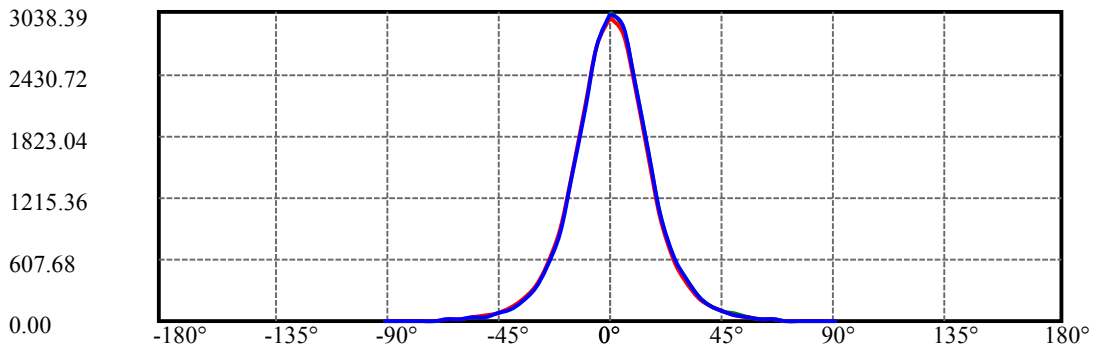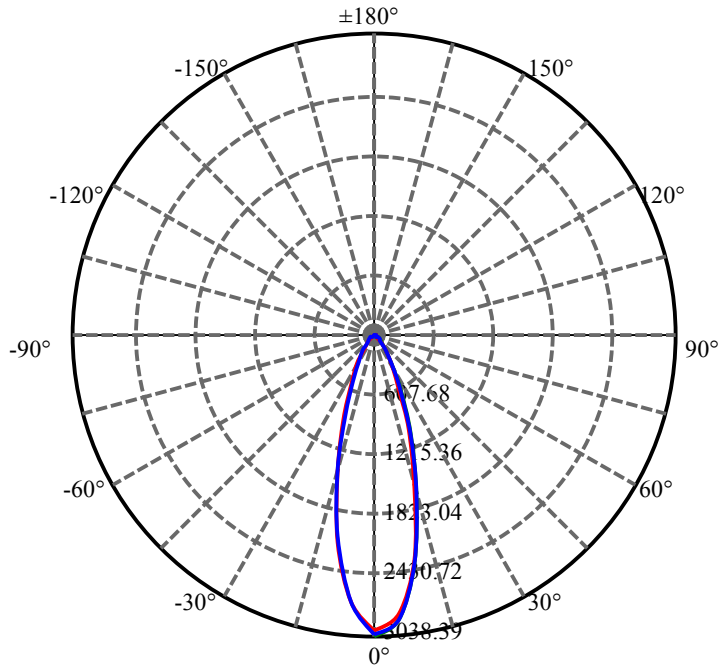


C30(Max): ——
C0/C180: ——
C90/C270: ——

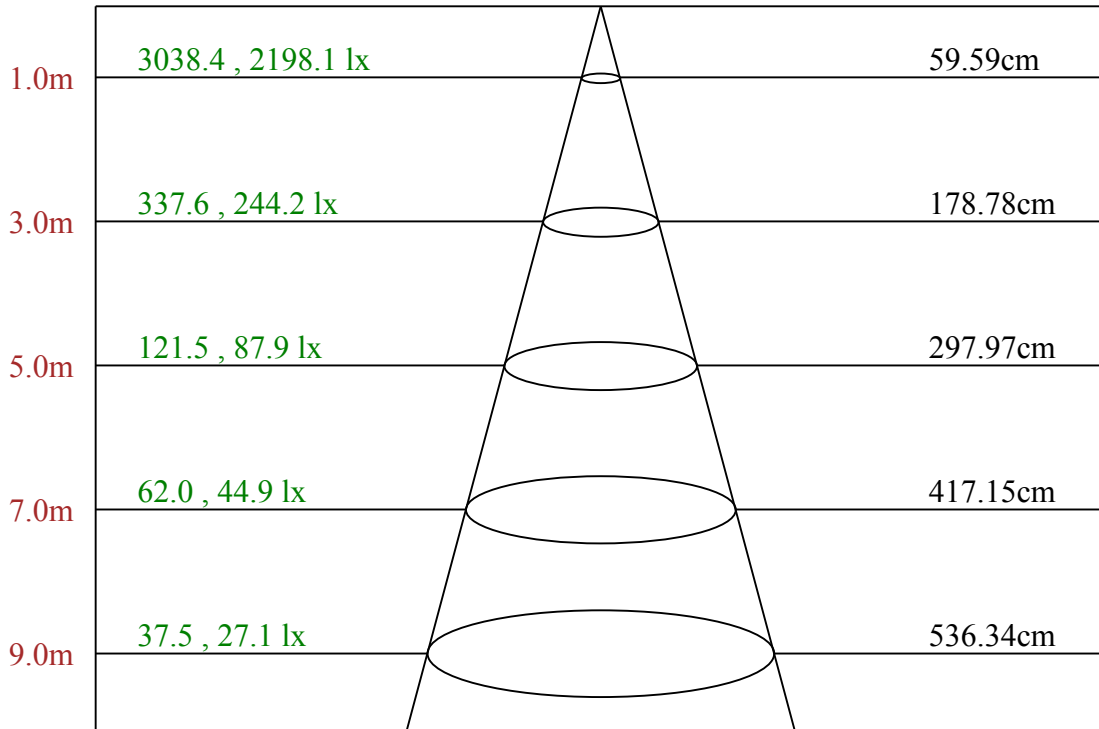

Max , Ave C30面光束角33.18

ROLED 投光灯
平面等照度曲线

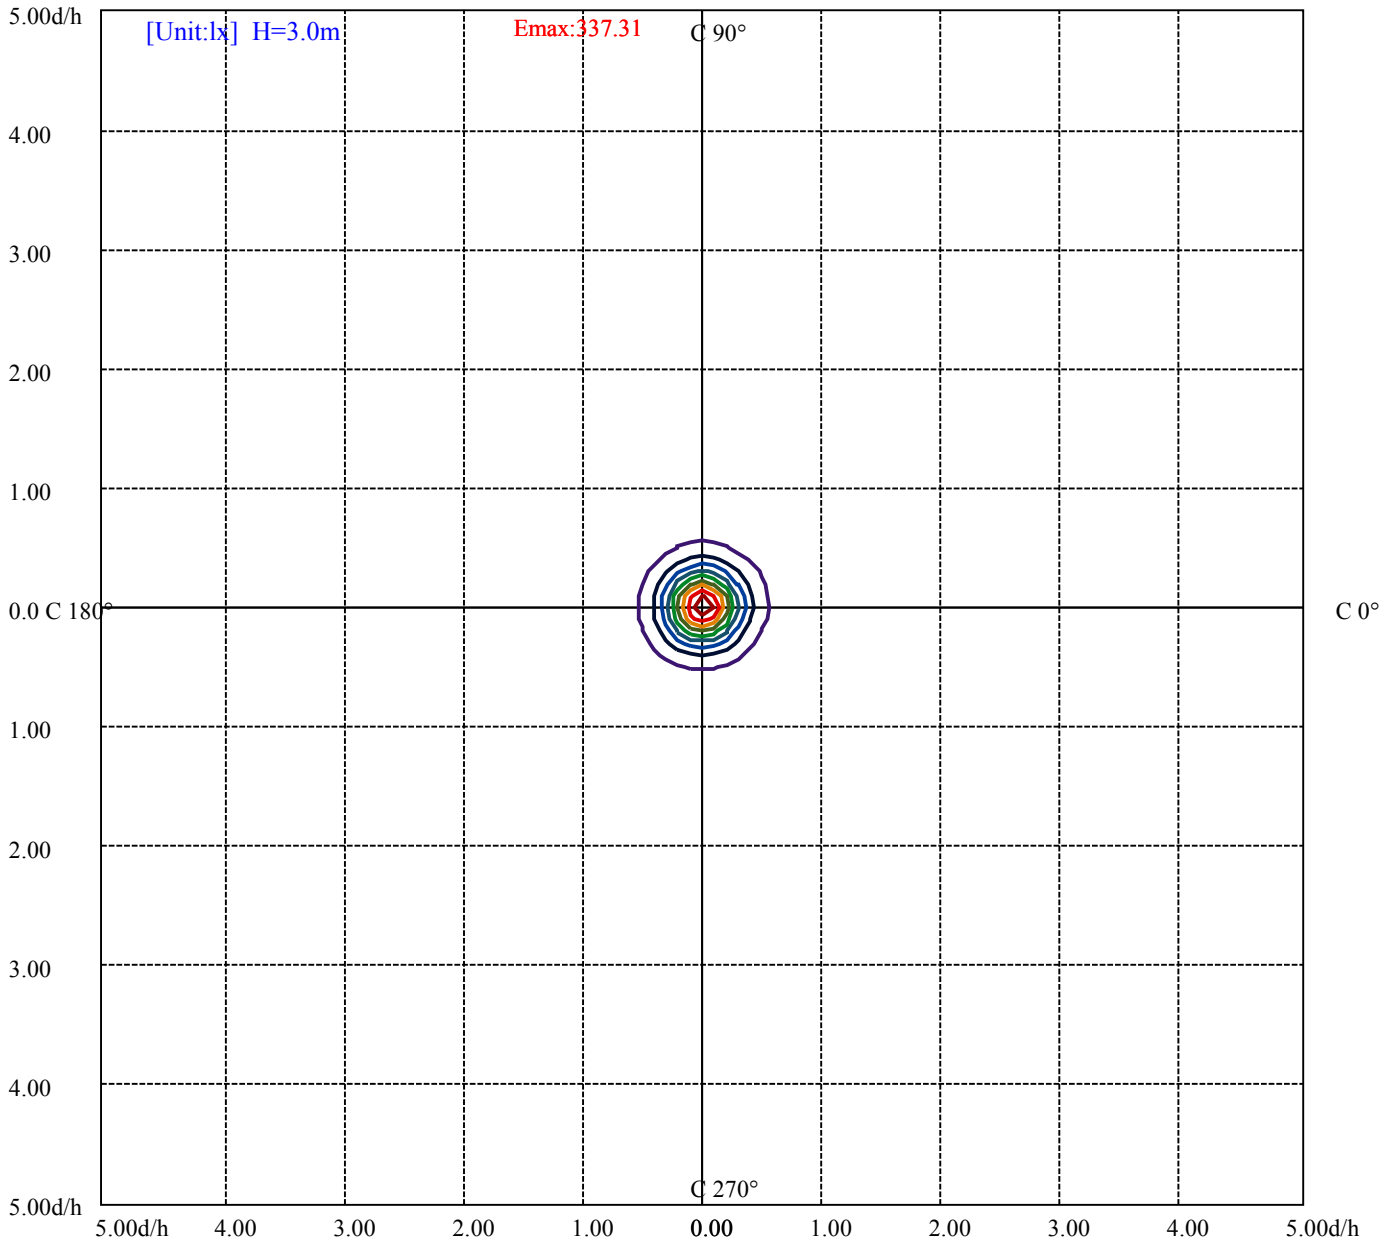

- (10%Emax) 33.731
- (20%Emax) 67.46211
- (30%Emax) 101.1931
- (40%Emax) 134.9244
- (50%Emax) 168.6556
- (60%Emax) 202.3867
- (70%Emax) 236.1178
- (80%Emax) 269.8478
- (90%Emax) 303.5789

测试设备: GMS-1800
环境温度(°C): 25.0

测试日期: 2022/12/19
环境湿度(%): 60.0%

测试人员: 安培楼
测试距离(m): 9.30

ROLED 投光灯

灯具的亮度限制曲线(灯具无发光侧边)

亮度值表


γ	45	50	55	60	65	70	75	80	85
C0	17911	12329	8098	6225	4277	2240	463	138	275
C45	0	0	0	0	0	0	0	0	0
C90	18453	13763	10435	5818	3541	2380	1156	207	275

L横(65)	L纵(65)	L45(65)	L横(75)	L纵(75)	L45(75)	L横(85)	L纵(85)	L45(85)
3881	3881	0	393	648	0	206	206	0

眩光等级表

眩光等级	质量等级	使用照度(lx)							
1.15	A	2000	1000	500	≤ 300				
1.5	B		2000	1000	500	≤ 300			
1.85	C			2000	1000	500	≤ 300		
2.2	D				2000	1000	500	≤ 300	
2.55	E					2000	1000	500	≤ 300
		a	b	c	d	e	f	g	h

亮度限制曲线

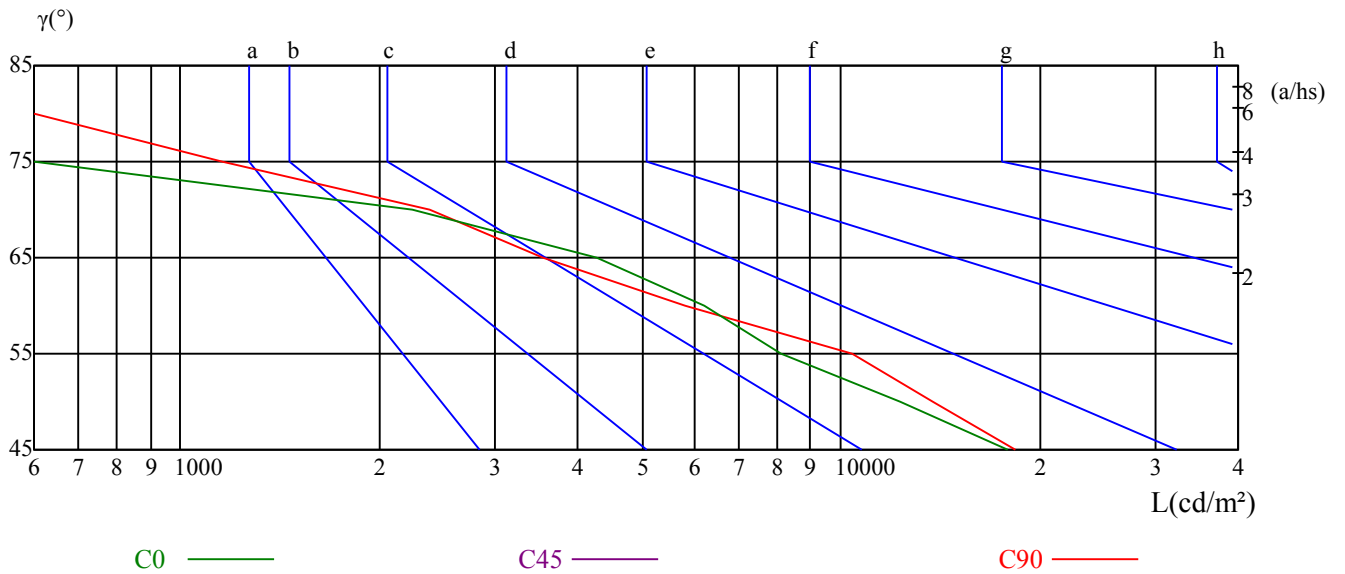

ROLED 投光灯

光强数据表(cd)

C/γ(°)	0.0	5.0	10.0	15.0	20.0	25.0	30.0	35.0	40.0
0.0	2982.18	2819.57	2294.58	1598.34	1017.99	611.48	398.81	230.24	142.28
30.0	3038.39	2873.20	2341.28	1633.80	1048.26	627.05	436.77	239.66	154.13
60.0	3033.20	2840.33	2264.31	1590.38	1018.59	612.52	377.44	237.93	149.97
90.0	3015.91	2878.39	2332.64	1651.96	1062.10	632.24	438.50	240.44	147.81
120.0	3009.85	2784.11	2219.33	1547.13	964.45	589.26	361.01	216.23	131.98
150.0	2996.01	2795.36	2240.96	1570.66	977.34	601.97	370.87	224.01	135.44
180.0	2982.18	2697.62	2113.82	1425.10	898.63	553.45	333.94	207.84	127.92
210.0	3038.39	2749.52	2149.28	1482.53	926.31	568.07	347.08	219.68	140.89
240.0	3033.20	2789.30	2184.74	1478.98	937.55	566.51	349.42	220.29	138.82
270.0	3015.91	2697.62	2072.30	1407.54	861.09	519.89	313.18	194.17	119.18
300.0	3009.85	2772.87	2168.30	1482.44	917.66	557.00	330.13	203.08	127.14
330.0	2996.01	2742.60	2157.06	1470.33	921.46	561.23	336.27	203.25	126.36
360.0	2982.18	2819.57	2294.58	1598.34	1017.99	611.48	398.81	230.24	142.28
C/γ(°)	45.0	50.0	55.0	60.0	65.0	70.0	75.0	80.0	85.0
0.0	91.51	57.26	33.56	22.49	13.06	5.54	0.86	0.17	0.17
30.0	101.89	67.29	41.17	25.26	16.17	8.39	1.12	0.26	0.09
60.0	98.08	67.29	47.22	29.84	12.20	6.23	3.11	0.26	0.17
90.0	94.27	63.92	43.25	21.02	10.81	5.88	2.16	0.26	0.17
120.0	85.80	58.29	39.96	24.48	11.42	5.97	2.59	0.26	0.17
150.0	87.01	56.56	35.63	22.31	14.53	6.92	1.12	0.26	0.09
180.0	81.21	50.25	31.05	20.76	10.64	4.93	0.61	0.26	0.09
210.0	91.94	61.32	39.27	23.44	10.64	5.28	1.82	0.17	0.17
240.0	91.07	58.73	33.90	22.66	14.36	6.31	0.86	0.26	0.09
270.0	72.74	43.50	28.80	19.29	12.89	3.29	0.26	0.17	0.09
300.0	80.00	50.77	31.40	20.84	13.23	5.45	0.69	0.09	0.09
330.0	82.51	54.83	33.99	19.55	9.17	4.58	1.12	0.26	0.17
360.0	91.51	57.26	33.56	22.49	13.06	5.54	0.86	0.17	0.17
C/γ(°)	90.0								
0.0	0.00								
30.0	0.00								
60.0	0.00								
90.0	0.09								
120.0	0.00								
150.0	0.00								
180.0	0.00								
210.0	0.00								
240.0	0.00								
270.0	0.00								
300.0	0.00								
330.0	0.00								
360.0	0.00								