

Roled Opto Electronics (China)Co.,Ltd
Http://www.roled.com.cn
Email:sensing@sensingm.com
Tel: 0573-84236688(-121) Fax:+86-0573-84882788
Address:No.8,HechuangRoad,HuimingStreet, JiashanCounty,Jiaxin City , Zhejiang Province.

ROLED

灯具名称: 水下灯
灯具描述: U1113A-6-12DC(45-OL-6WN-AA.P1)
报告编号: 电压(V): 10.7000
测试编号: 20211029004 电流(A): 0.6210
光源规格型号: OL 功率(W): 6.6000
每个光源光通量(lm) 功率因数: 1.0100
光源数量: 6 镇流器型号:
发光面长度(mm): 80 发光面宽度 (mm): 80
测试模式: C 发光面高度(mm): 0



光度结果

灯具光通量(lm): 557.84
灯具效能(lm/w): 84.52
中心光强(cd): 720.643
最大光强(cd): 724.250
最大光强角度: $C=30.0 \gamma=0.0$
半峰边角(50%Imax): [C0/180]Total=43.9
 [C90/270]Total=44.4
光束扩散角(10%Imax): [C0/180]Total=89.6
 [C90/270]Total=89.8


测试设备: GMS1800
环境温度(°C): 25.0

测试日期: 2021/10/29
环境湿度(%): 60.0%

测试人员: anpeilou
测试距离(m): 8.76

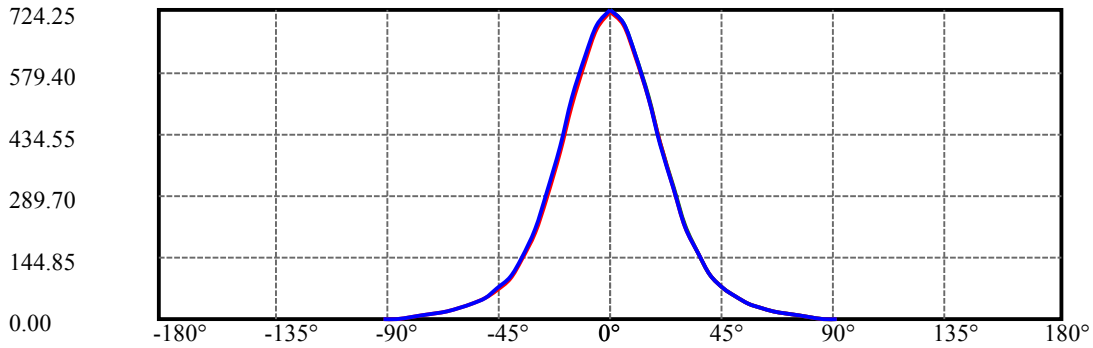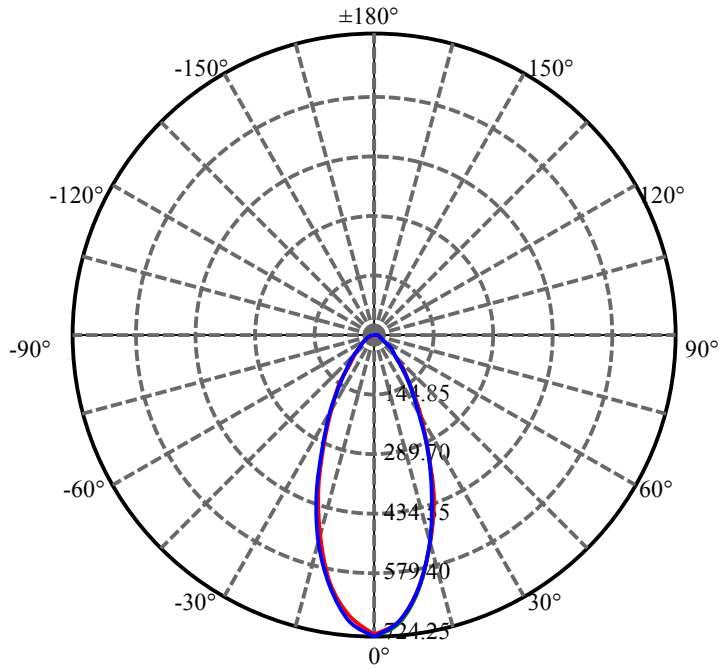


C30(Max): ————
C0/C180: ————
C90/C270: ————

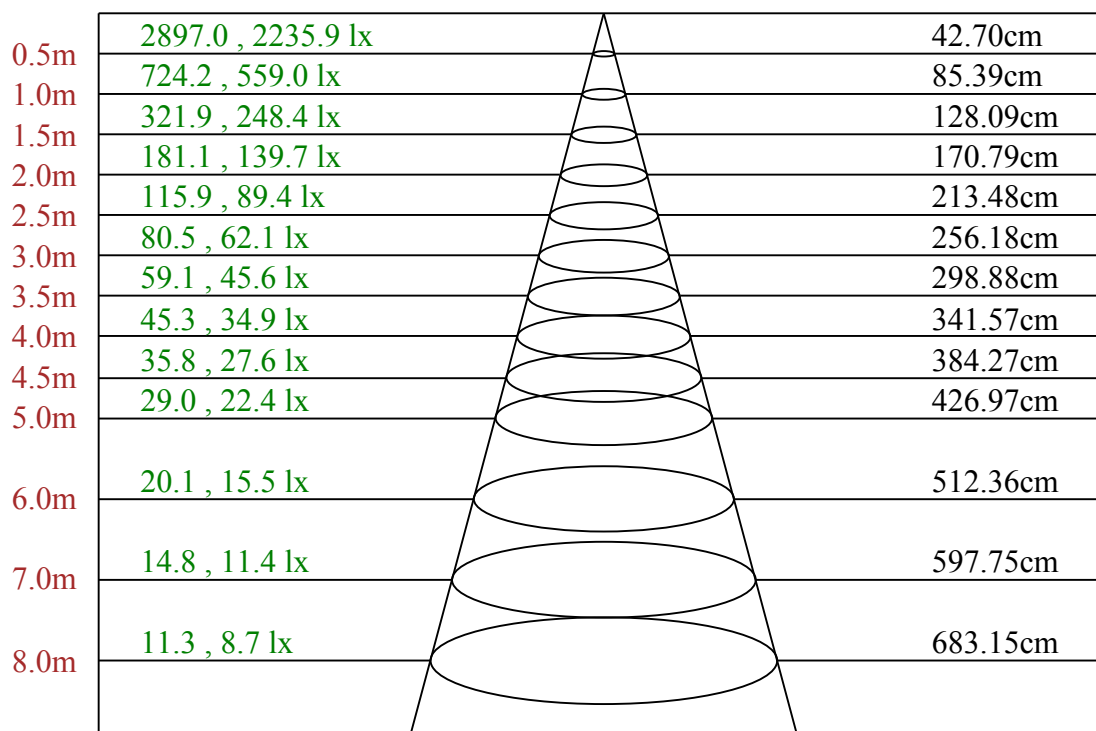

Max , Ave C30面光束角46.24

ROLED 水下灯
平面等照度曲线

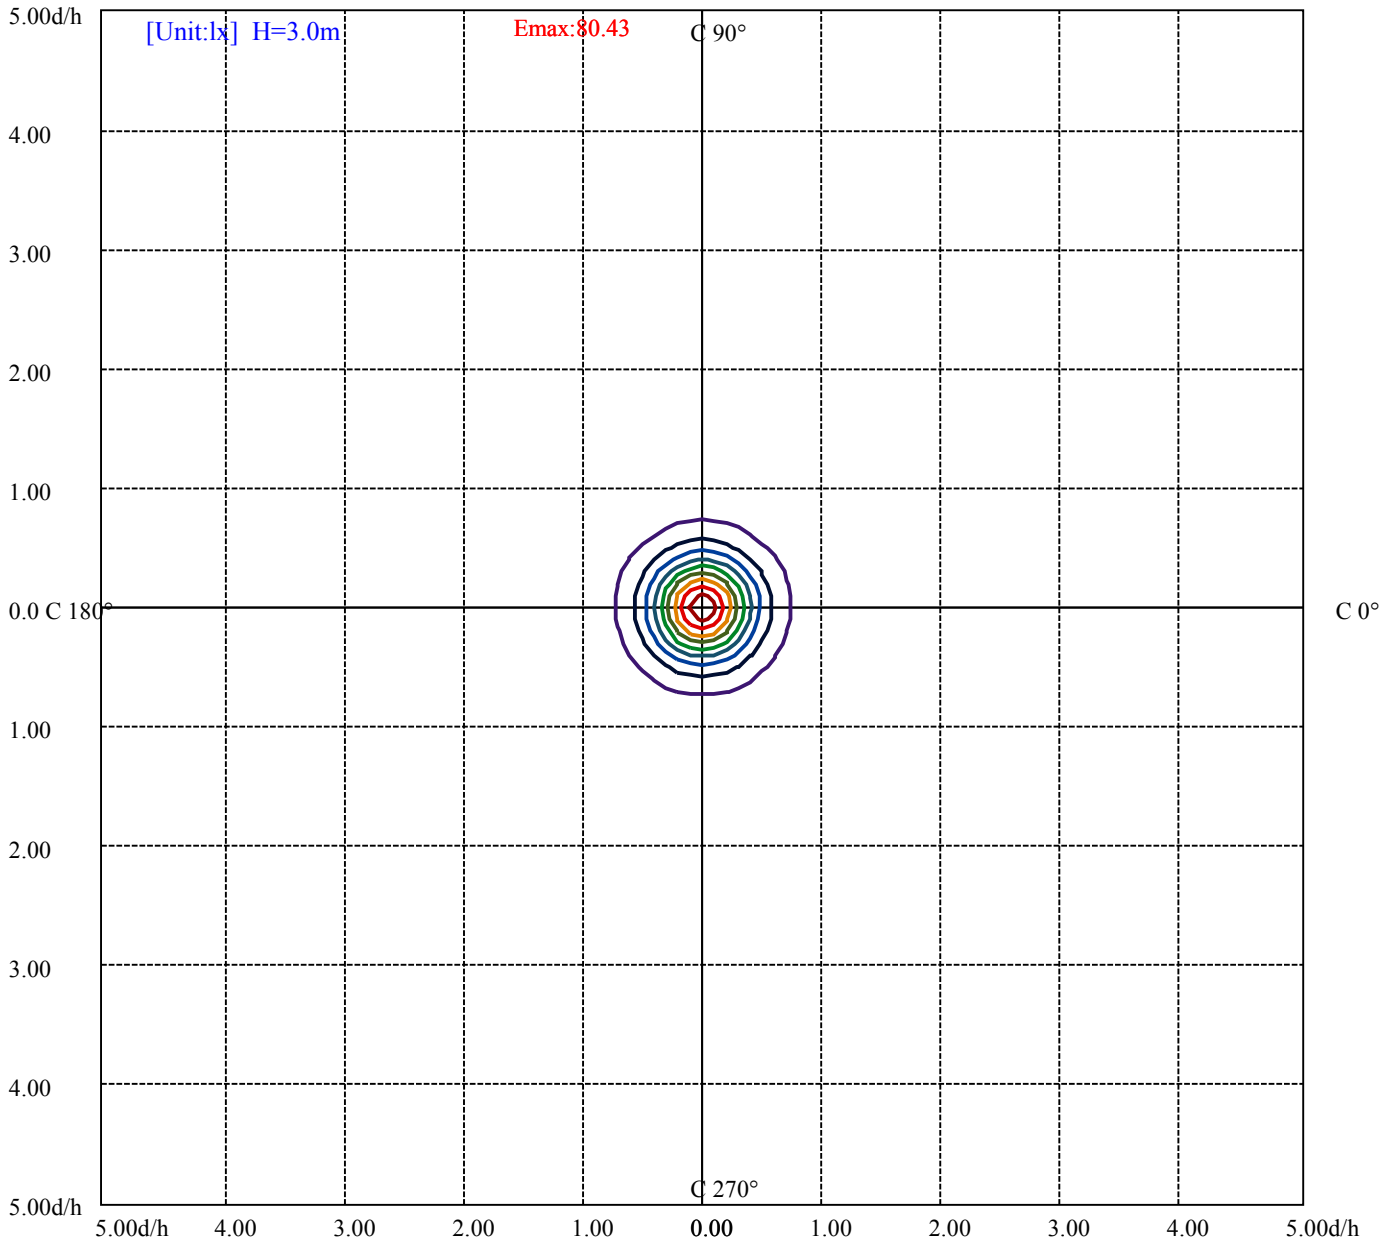

(10%Emax) 8.042511	——
(20%Emax) 16.085	——
(30%Emax) 24.12756	——
(40%Emax) 32.17011	——
(50%Emax) 40.21255	——
(60%Emax) 48.25511	——
(70%Emax) 56.29756	——
(80%Emax) 64.34011	——
(90%Emax) 72.38266	——

测试设备: GMS1800
环境温度(°C): 25.0

测试日期: 2021/10/29
环境湿度(%): 60.0%

测试人员: anpeilou
测试距离(m): 8.76

ROLED 水下灯

灯具的亮度限制曲线(灯具无发光侧边)

亮度值表


γ	45	50	55	60	65	70	75	80	85
C0	16228	12647	10201	8537	7291	5995	4679	3038	1238
C45	0	0	0	0	0	0	0	0	0
C90	16143	12722	10327	8633	7405	6345	4957	3314	1101

L横(65)	L纵(65)	L45(65)	L横(75)	L纵(75)	L45(75)	L横(85)	L纵(85)	L45(85)
6979	7093	0	4424	4586	0	1101	894	0

眩光等级表

眩光等级	质量等级	使用照度(lx)							
1.15	A	2000	1000	500	≤ 300				
1.5	B		2000	1000	500	≤ 300			
1.85	C			2000	1000	500	≤ 300		
2.2	D				2000	1000	500	≤ 300	
2.55	E					2000	1000	500	≤ 300
		a	b	c	d	e	f	g	h

亮度限制曲线

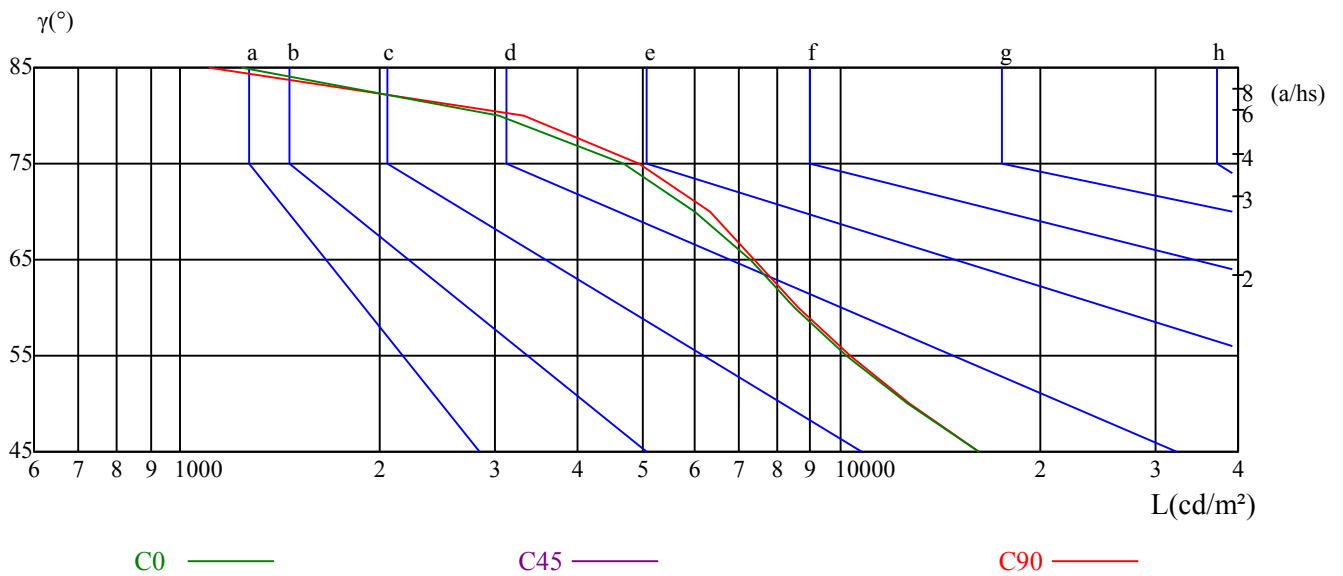

参照UGR的照射评估											
天花板反射率		70	70	50	50	30	70	70	50	50	30
墙壁反射率		50	30	50	30	30	50	30	50	30	30
地板反射率		20	20	20	20	20	20	20	20	20	20
空间尺寸		Viewed crosswise					Viewed endwise				
X	Y										
2H	2H	18.77	19.95	19.13	20.26	20.57	18.69	19.86	19.05	20.18	20.49
	3H	19.84	20.88	20.22	21.21	21.58	19.73	20.77	20.11	21.10	21.47
	4H	20.13	21.09	20.53	21.45	21.83	20.01	20.97	20.41	21.33	21.71
	6H	20.23	21.12	20.65	21.49	21.88	20.11	20.99	20.52	21.37	21.76
	8H	20.22	21.06	20.65	21.45	21.85	20.10	20.93	20.53	21.33	21.73
	12H	20.20	21.00	20.63	21.38	21.81	20.08	20.88	20.51	21.26	21.69
4H	2H	19.09	20.05	19.49	20.40	20.79	19.02	19.98	19.42	20.34	20.72
	3H	20.33	21.12	20.75	21.53	21.93	20.24	21.03	20.65	21.43	21.84
	4H	20.69	21.40	21.13	21.82	22.26	20.59	21.29	21.02	21.71	22.16
	6H	20.82	21.43	21.29	21.88	22.35	20.72	21.32	21.18	21.77	22.24
	8H	20.82	21.38	21.29	21.83	22.30	20.71	21.27	21.18	21.72	22.20
	12H	20.79	21.28	21.28	21.77	22.25	20.69	21.18	21.18	21.67	22.15
8H	4H	20.75	21.32	21.23	21.76	22.24	20.65	21.22	21.13	21.67	22.14
	6H	20.92	21.37	21.42	21.87	22.35	20.82	21.27	21.32	21.77	22.25
	8H	20.93	21.33	21.46	21.85	22.35	20.83	21.24	21.36	21.76	22.25
	12H	21.56	21.91	22.08	22.41	22.98	21.47	21.82	21.98	22.31	22.89
12H	4H	20.72	21.21	21.20	21.69	22.17	20.62	21.11	21.11	21.60	22.07
	6H	21.32	21.29	21.42	21.76	22.31	21.23	21.19	21.32	21.66	22.21
	8H	20.92	21.27	21.43	21.76	22.34	20.82	21.17	21.34	21.67	22.25
对应照射距离，改变观察者位置S											
S = 1.0H		0.9/-1.1					0.9/-1.2				
S = 1.5H		1.9/-1.8					2.0/-1.9				
S = 2.0H		4.0/-2.2					4.0/-2.3				
标准表格		BK2					BK2				
更正系数		2.0					2.0				

ROLED 水下灯

光强数据表(cd)

附页 第7页 共7页

C/γ(°)	0.0	5.0	10.0	15.0	20.0	25.0	30.0	35.0	40.0
0.0	720.64	690.25	616.74	518.44	412.31	304.42	216.94	152.71	104.82
30.0	724.25	693.40	622.19	522.35	415.61	310.33	218.63	153.32	105.44
60.0	723.41	688.03	614.44	514.37	399.27	295.13	208.19	146.19	100.45
90.0	722.87	691.48	619.27	518.06	409.32	304.03	214.48	150.79	105.44
120.0	721.87	680.43	605.15	502.25	392.74	288.76	204.35	143.19	100.14
150.0	721.72	686.11	613.67	512.91	400.65	296.74	212.10	147.03	100.53
180.0	720.64	678.21	603.23	500.56	391.67	285.23	202.43	141.27	96.69
210.0	724.25	682.50	607.61	506.54	397.73	293.44	206.73	141.50	97.69
240.0	723.41	694.17	627.02	525.73	415.69	305.19	214.33	150.10	103.90
270.0	722.87	687.80	615.59	515.22	405.02	299.12	211.72	145.11	100.30
300.0	721.87	692.79	625.56	525.88	415.30	310.17	221.23	152.94	105.90
330.0	721.72	687.65	611.52	511.46	403.56	295.75	211.64	145.26	100.83
360.0	720.64	690.25	616.74	518.44	412.31	304.42	216.94	152.71	104.82
C/γ(°)	45.0	50.0	55.0	60.0	65.0	70.0	75.0	80.0	85.0
0.0	73.44	52.03	37.45	27.32	19.72	13.12	7.75	3.38	0.69
30.0	74.05	52.18	37.99	27.93	19.95	13.66	8.06	3.45	0.54
60.0	71.14	51.41	37.52	27.78	19.80	13.43	7.83	3.30	0.61
90.0	73.05	52.34	37.91	27.63	20.03	13.89	8.21	3.68	0.61
120.0	69.68	49.27	36.14	26.47	18.88	12.97	7.60	3.07	0.23
150.0	70.83	50.88	36.76	26.93	19.34	13.28	7.98	3.38	0.54
180.0	67.99	48.11	35.07	25.02	18.03	12.12	6.91	2.84	0.54
210.0	68.30	47.73	34.46	24.94	17.65	11.97	6.75	2.53	0.46
240.0	71.29	51.03	36.91	26.47	19.26	13.05	7.37	2.84	0.38
270.0	69.98	48.88	35.30	25.40	18.34	12.43	6.98	2.61	0.38
300.0	73.51	51.64	37.22	26.55	19.18	12.82	7.44	2.99	0.46
330.0	69.75	49.96	36.60	26.40	18.80	12.58	7.29	2.76	0.38
360.0	73.44	52.03	37.45	27.32	19.72	13.12	7.75	3.38	0.69
C/γ(°)	90.0								
0.0	0.00								
30.0	0.00								
60.0	0.00								
90.0	0.00								
120.0	0.00								
150.0	0.08								
180.0	0.00								
210.0	0.00								
240.0	0.00								
270.0	0.00								
300.0	0.00								
330.0	0.00								
360.0	0.00								